



**ROCHESTER
GAUGES, INC.**

ISO 9001:2008 CERTIFIED

Cut-Off Lengths For 9341-7000 Series

DS-1763

9341-7000 Series Senders ONLY

NOTE: The given cut-off length will allow a minimum of 1" clearance to the bottom of tank at empty.


TANK DEPTH

4" to 4-1/2"
4-1/2" to 5"
5-1/4" to 5-3/4"
6"
6-1/2"
7"
7-1/2"
8"
8-1/2"
9"
9-1/2"
10"
10-1/2"
11"
11-1/2"
12"
12-1/2"
13"
13-1/2"
14"
14-1/2"
15"
15-1/2"
16"
16-1/2"
17"
17-1/2"
18"
18-1/2"
19"
19-1/2"
20"
20-1/2"
21"
21-1/2"
22"
22-1/2"
23"
23-1/2"
24"
24-1/2"
25"

DISTANCE FROM END OF WIRE TO FLOAT ROD 90° BEND POINT

Order p/n 0020-00588
Order p/n 0020-00586
Order p/n 0020-00587

2-5/8" *
2-5/8"
3-1/8"
3-5/8"
4-1/8"
4-5/8"
5-1/4"
5-3/4"
6-1/4"
6-3/4"
7-1/4"
7-7/8"
8-3/8"
8-7/8"
9-3/8"
9-7/8"
10-1/2"
11"
11-1/2"
12"
12-1/2"
13"
13-5/8"
14-1/8"
14-5/8"
15-1/8"
15-5/8" **
16-1/8"
16-3/4"
17-1/4"
17-3/4"
18-1/4"
18-7/8"
19-3/8"
19-7/8"
20-3/8"
21"
21-1/2"
22" ***

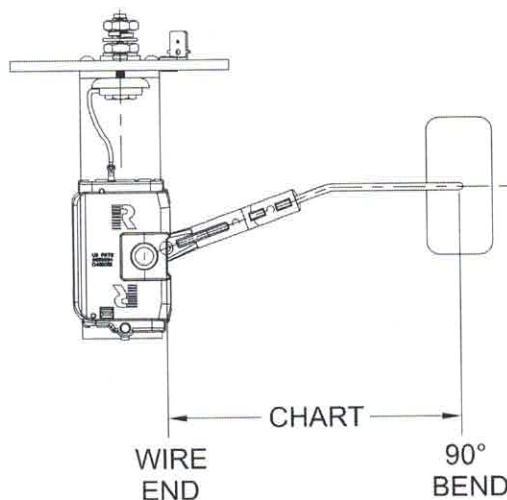

FOR 72.5° FLOAT TRAVEL

*NOTE: 1/2" CLEARANCE @ E

**NOTE: FLAT FLOAT IS APPROX. 80% SUBMERGED

***NOTE: CYLINDRICAL FLOAT IS APPROX. 80% SUBMERGED

* Materials and specifications subject to change without notice.
Ratings subject to change due to temperature and other environmental considerations.

Cut-Off Lengths For 9341-7000 Series

08/19/14



**ROCHESTER
GAUGES, INC.**

The Measure of Excellence

11616 Harry Hines Blvd. • P.O. Box 29242 • Dallas, TX 75229 • (972) 241-2161 • FAX (972) 620-3374
Website <http://www.rochestergauges.com> • E-mail info@rochestergauges.com



**ROCHESTER
GAUGES, INC.**

ISO 9001:2008 CERTIFIED

Cut-Off Lengths For 9341-7000 Series

DS-1763

9341-7000 Series Senders ONLY

NOTE: The given cut-off length will allow a minimum of 1" clearance to the bottom of tank at empty.


TANK DEPTH

4" to 4-1/2"
4-1/2" to 5"
5-1/4" to 5-3/4"
6"
6-1/2"
7"
7-1/2"
8"
8-1/2"
9"
9-1/2"
10"
10-1/2"
11"
11-1/2"
12"
12-1/2"
13"
13-1/2"
14"
14-1/2"
15"
15-1/2"
16"
16-1/2"
17"
17-1/2"
18"
18-1/2"
19"
19-1/2"
20"
20-1/2"
21"
21-1/2"
22"
22-1/2"
23"
23-1/2"
24"
24-1/2"
25"

DISTANCE FROM END OF WIRE TO FLOAT ROD 90° BEND POINT

Order p/n 0020-00588
Order p/n 0020-00586
Order p/n 0020-00587

2-5/8" *
2-5/8"
3-1/8"
3-5/8"
4-1/8"
4-5/8"
5-1/4"
5-3/4"
6-1/4"
6-3/4"
7-1/4"
7-7/8"
8-3/8"
8-7/8"
9-3/8"
9-7/8"
10-1/2"
11"
11-1/2"
12"
12-1/2"
13"
13-5/8"
14-1/8"
14-5/8"
15-1/8"
15-5/8"
16-1/4"
16-3/4"
17-1/4"
17-3/4"
18-1/4"
18-7/8"
19-3/8"
19-7/8"
20-3/8"
21"
21-1/2"
22" ***

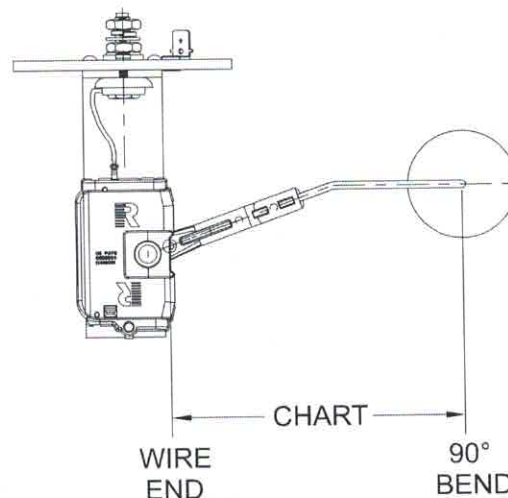

Cut-Off Lengths For 9341-7000 Series

FOR 72.5° FLOAT TRAVEL


*NOTE: 1/2" CLEARANCE @ E

***NOTE: CYLINDRICAL FLOAT IS APPROX. 75% SUBMERGED

See reverse side for dimensional data, materials of construction, performance, and advice on how to order.

The Measure of Excellence

08/19/14

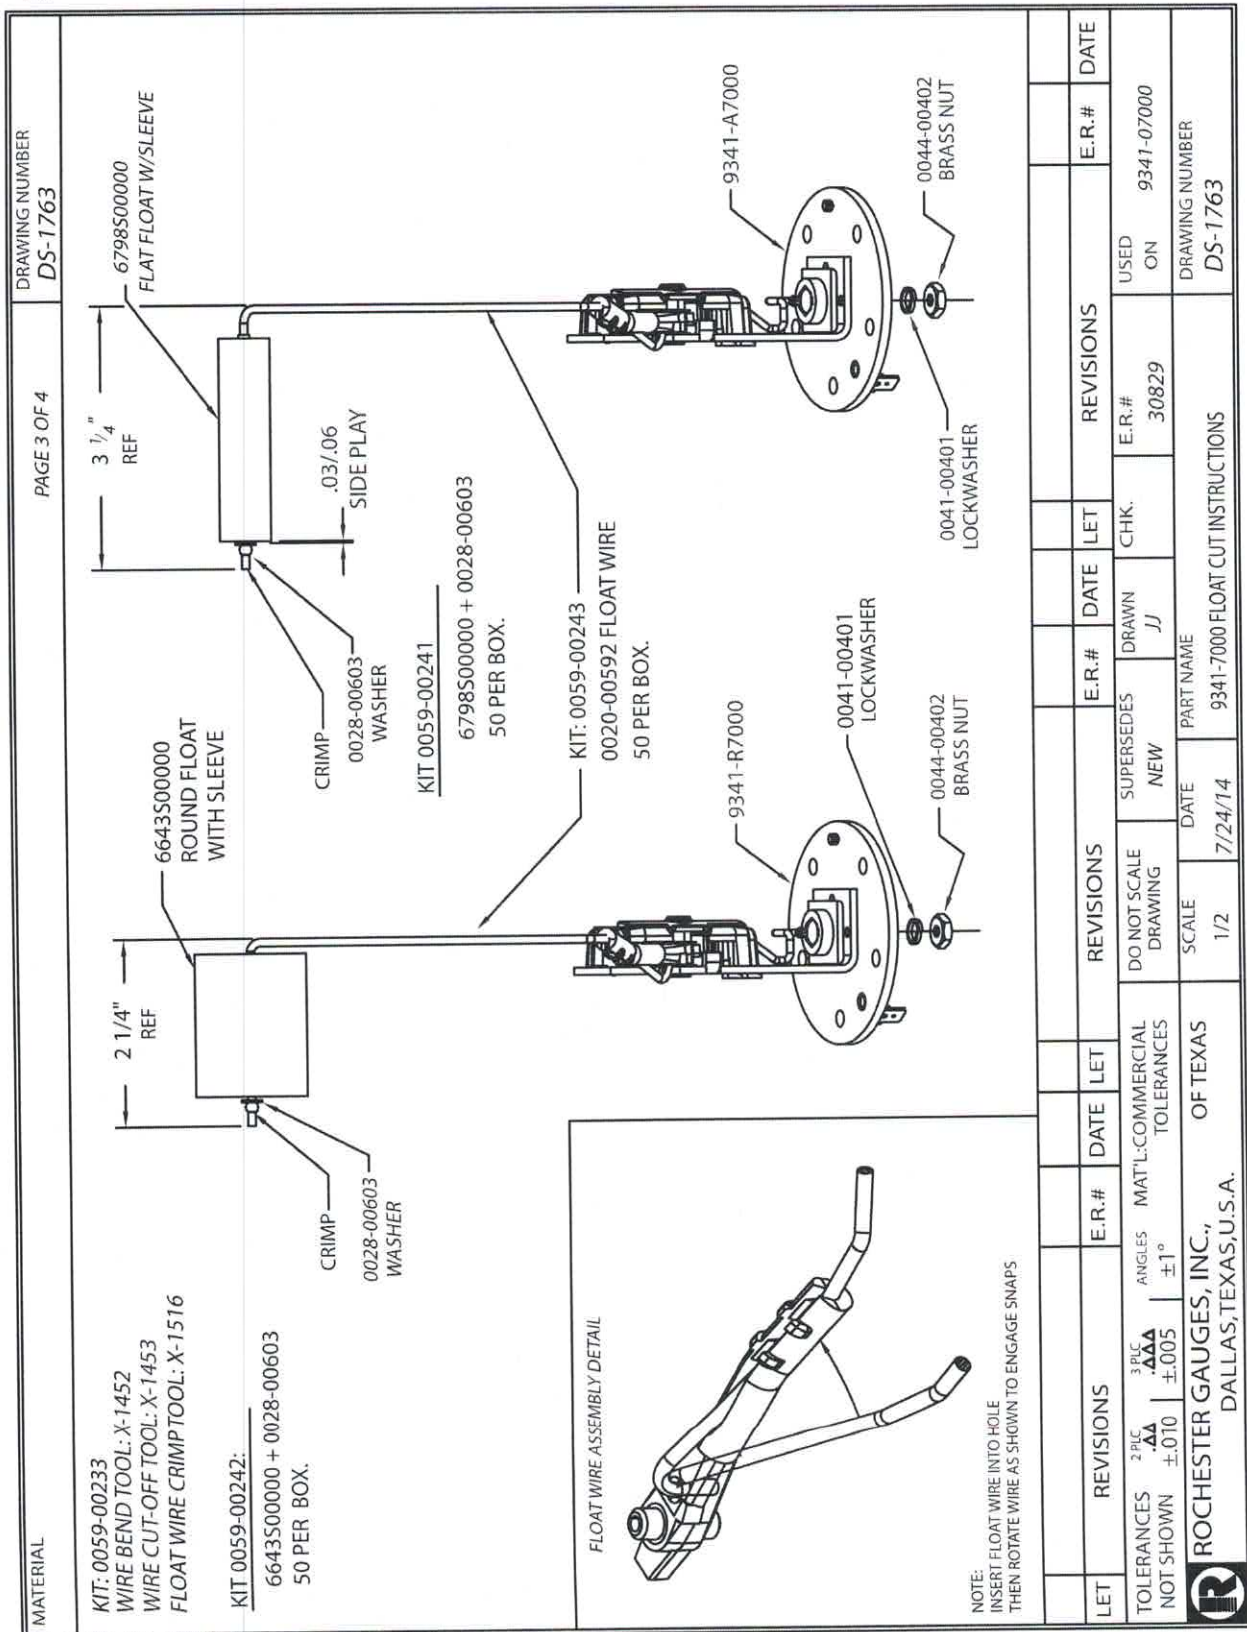

08/19/14

