

Emergency Battery Power Supply

TS835 Series

Manufactured by Mid-Continent Instrument Co., Inc.

The TS835 Series Emergency Battery Power Supply automatically provides 24.5 VDC power for critical or standby equipment in the event of aircraft power failure. The TS835-5 and -6 include an integrated 5V output.



TS835-1

The emergency battery power supply features an advanced NanoPhosphate[®] lithium-ion cell chemistry that offers distinct advantages over older, lead-acid designs. This includes a 63% weight savings, reduced maintenance costs and an improved 8-year life expectancy.

The TS835 is a direct replacement for L-3 Avionics/JET PS-835 or PS-855 power supplies.

Product features

CAPACITY	4.5 amp-hour battery nominal
WEIGHT	4.8 lbs – 8 pounds lighter than legacy lead-acid designs
TECHNOLOGY	Advanced NanoPhosphate [®] lithium-ion cell chemistry
INPUT VOLTAGE	20 – 32 VDC, 5.2 amps max
OUTPUT POWER	24.5 VDC nominal, 20 amps max TS835-5 and -6 include 3.0 – 5.5 VDC adjustable lighting output, 5.0 amps max TS835-6 includes Continuous On under light loads
MAINTENANCE SCHEDULE	2 years
LIFE EXPECTANCY	8 years (average)
DIRECT REPLACEMENT	L-3 Avionics/JET PS-835 or PS-855 (same rack mount and connector)
RECHARGING	Maintains full charge by recharging during normal flight operations
DESIGNED AND MANUFACTURED	Wichita, Kansas, USA
WARRANTY	Five-year limited

Kansas

9400 East 34th Street North
Wichita, Kansas 67226 USA
Tel 316.630.0101 800.821.1212
Fax 316.630.0723
tbp@mcico.com


California

9722 Topanga Canyon Blvd
Chatsworth, California 91311 USA
Tel 818.786.0300 800.345.7599
Fax 818.786.2734
tbp@mcico.com

Emergency Battery Power Supply

TS835 Series

Manufactured by Mid-Continent Instrument Co., Inc.

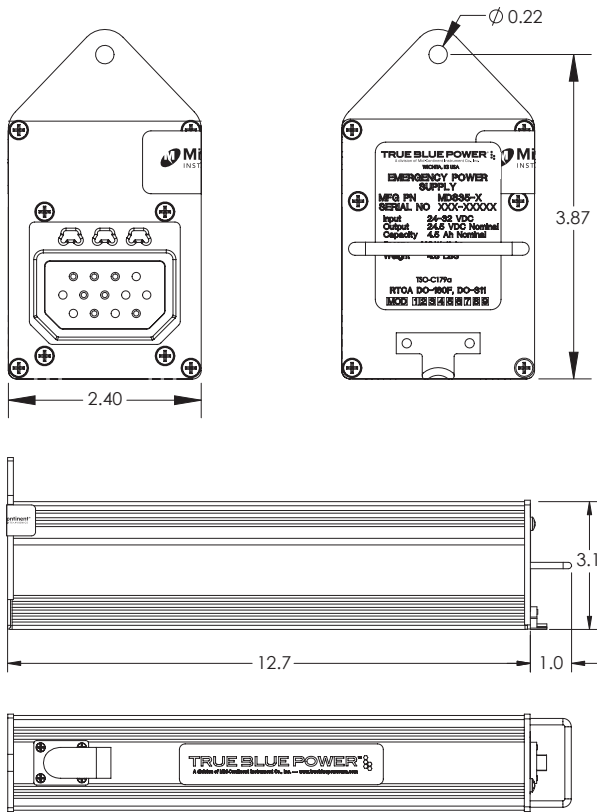

Remote test switch specifications


POWER INPUT	28 VDC, 15 amps max
LIGHTING	LED
WEIGHT	0.35 lbs
TEMPERATURE	-55°C to 70°C
ALTITUDE	0 to +55,000 ft
MATING CONNECTOR	MS3106F1-6S-1S
CASE	Anodized aluminum, black

Product comparison

Part Number	Battery Technology	Voltage Output	Capacity (1C rate)	Weight	Maintenance	Life Expectancy
TS835-1, TS835-5, TS835-6	Lithium-ion	24.5 VDC	4.5 amp-hours	4.8 lbs	2 years	8 years (average)
PS-835, PS-855	Lead-acid	24.0 VDC	4.2 amp-hours	13.0 lbs	1 year	3 years

Technical specifications

CAPACITY	4.5 amp-hour battery nominal
INPUT	20 – 32 VDC, 5.2 amps max
OUTPUT	24.5 VDC nominal, 20 amps max TS835-5 and -6 include 3.0 – 5.5 VDC adjustable lighting output, 5.0 amps max TS835-6 includes Continuous On under light loads
WEIGHT	4.8 lbs – 8 pounds lighter than legacy lead-acid designs
DIMENSIONS (approx.)	3.1"H x 12.7"L x 2.4"W
LIFE EXPECTANCY	8 years (average)
PROTECTION	Factory replaceable fuse
MATING CONNECTOR	DPXB13-33S-0001
RACK MOUNT	1/4 ATR rack
OPTIONAL VENT KIT	MCI P/N 9017983
REMOTE TEST SWITCH	Remote-mounted self-test switch required MCI P/N 9017176 or equivalent
CASE	Anodized aluminum, blue
CERTIFICATION	FAA TSO-C179b, Class A-3B RTCA-DO-160F/G qualified RTCA-DO-311A qualified

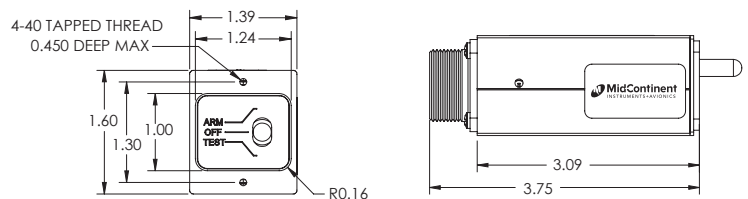

Remote-mounted test switch